

Limit Switch Inductive sensor Type IFM IN5290


- IND2004DARKG
- Inductive sensor
- Cable
- Sensing range 4 mm
- non-flush mountable



TECHNICAL DATA

Electrical design	DC PNP/NPN
Output	2 x normally open
Operating voltage (V)	10...36 DC
Current rating (mA)	250
Minimum load current (mA)	4
Short-circuit protection	pulsed
Reverse polarity protection	yes
Overload protection	yes
Voltage drop (V)	< 4.6
Leakage current (mA)	2 x 0.8
Real sensing range (mm)	4 ± 10 %
Operating distance (mm)	0...3.25
Switch-point drift (% of Sr)	-10...10
Hysteresis (% of Sr)	3...15
Switching frequency (Hz)	1400
Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.5 / Al approx. 0.4 / Cu approx. 0.3
Ambient temperature (°C)	-25...80
Protection	IP 67, II
EMC	EN 60947-5-2 EN 55011: class B
Housing materials	PBT; PC (polycarbonate)
Function display Switching status	LED 2 x yellow
Connection	PVC cable / 2 m; 4 x 0.34 mm ²
Weight (kg)	0.136

DIMENSION

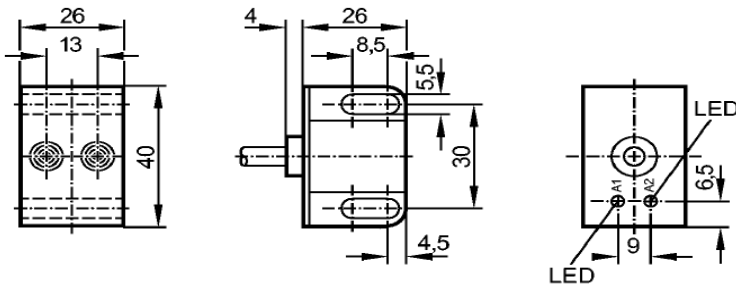

WIRING

