

PILOT OPERATED PRESSURE REDUCING VALVES PRV47/2 DN65 – DN100

DESCRIPTION

The ADCA PRV47/2 pilot operated pressure reducing valves are designed for use on steam, compressed air, nitrogen and other gases compatible with the construction and they can be installed on pressure reducing stations throughout all industries. Connections are flanged.

MAIN FEATURES

Robust complete carbon steel construction.
 Suitable for dead end conditions.
 Guided piston and valve stem.
 Hardened plug.

OPTIONS: Soft faced valve plug for gases and steam
 Special pressure top for low pressures
 Stellite plug and seat
 Balance pipe connected to the valve body

USE: Saturated steam, compressed air and other gases (Group 2) compatible with the construction (except oxygen).

AVAILABLE MODELS: PRV47/2 - standard model for steam
 PRV47/2G -compressed air and gases

VALVE SIZES: DN65 to DN100

CONNECTIONS: Flanged EN1092-1

INSTALLATION: Horizontal installation.
 An "Y" strainer, steam separator and steam trap should be provided upstream the valve.
 See IMI, installation and maintenance instructions.

ORDER

REQUIREMENTS: Type of fluid
 Maximum operating temperature
 Inlet and outlet pressure
 Flow rate (maximum and minimum)



USEFUL NOTES ON VALVE AND PIPE SIZING

A special low pressure top assembly should be fitted for outlet pressures from 0,07 up to 0,5 bar (Fig.2).

Two regulators in parallel should be used on larger systems where minimum flow is less than 10% of maximum. If the flow is unknown it is possible to estimate it based on pipe sizing or equipment heat requirement - please consult.

The balance pipe connection is recommend to enter downstream pipe at a minimum of 1 meter from valve. A spool piece can be supplied to house the balancing pipe.

HOW TO SELECT: Never size the valve according to the pipe diameter in which it has to be fitted but according to the required actual flow of fluid.

Refer to valve calculation table or consult the factory.

INSTALLATION

Installation instructions are available (IMI-PRV47) and typical assembling drawing. Special assembling design may be produced on request.

VALVE BODY LIMITING CONDITIONS			
PN16 *		PN40 *	
ALLOW. PRESS.	RELATED TEMP.	ALLOW. PRESS.	RELATED TEMP.
16 bar	-10/50 °C	40 bar	-10 /50° C
13,3 bar	200 °C	33,3 bar	200 °C
12,1 bar	250 °C	30,4 bar	250 °C
11 bar	300 °C	27,6 bar	300 °C

* Rating according to EN1092-1:2007.

CE MARKING (PED - European Directive 97/23/EC)		
PN 16	PN 40	Category
DN65 to DN100	DN40 to DN100	1 (CE Marked)

LIMITING CONDITIONS (Steam)		
	PN 16	PN40
Max.upstream pressure	13 bar	28 bar
Max.downstream pressure	13 bar	17 bar
Min.downstream pressure *	0,35 bar	0,35 bar
Max.operating temperature	250°C	250°C
Max.reducing ratio	See capacity table	
Rangeability	10:1	10:1
Max.cold hydraulic test	17 bar	17 bar
Max.hyd. factory valve body test	24 bar	60 bar

* 0,07 bar with low pressure top (limited at 7 bar inlet).



Pressure and temperature may change if soft seating or soft piston rings are used.

We reserve the right to change the design and material of this product without notice.


VALSTEAM ADCA

MATERIALS - PRV47/2 Carbon steel construction		
POS.	DESIGNATION	MATERIAL
1	VALVE BODY	ASTM A216WCB / 1.0619
1A	PISTON HOUSING	ASTM A216WCB / 1.0619
1B	STEM GUIDE	Bronze B62/ASTM B148.97
1C	*GASKET	ST.ST/GRAPHITE
1D	*PLAIN BEARING	BRONZE
2	PILOT VALVE BODY	CF8 / 1.4308
2A	PILOT VALVE BODY	CF8 / 1.4308
3	TOP COVER	CF8 / 1.4308
3A	COVER SPRING	CF8 / 1.4308
3B	TOP COVER	CF8 / 1.4308
3C	COVER NUT	C45E / 1.1191
4	*MAIN VALVE SEAT	AISI316 / 1.4401
5	*MAIN VALVE	HARDENED ST. STEEL
5A	*MAIN VALVE (SOFT)	SS316 W/ PTFE/GR; RULON,...
5B	*VALVE STEM	AISI316 / 1.4401
5C	*BALL	AISI40C / 1.4125
5D	*PLAIN BEARING	BRONZE
5E	*SPRING PIN	AISI304 / 1.4301
6	*MAIN VALVE SPRING	AISI302 / 1.4300
7	*PISTON	Bronze B62/ASTM B148.97
8	*PISTON RINGS	BRONZE / FKM / EPDM / NBR
9	PISTON LINER	AISI304L / 1.4306
9A	*GASKET	ST.ST/GRAPHITE
10	BOTTOM COVER	C45E / 1.1191
11	*BOTTOM COVER GASKET	ST.ST/GRAPHITE
12	*DIAPHRAGM	AISI301 / 1.4310
12A	*LOW PRESSURE DIAPHRAGM	AISI301 / 1.4310
13	*DIAPHRAGM GASKET	ST. STEEL/GRAPHITE
13A	*DIAPHRAGM GASKET	ST. STEEL/GRAPHITE
14	*PILOT VALVE GASKET	ST. STEEL/GRAPHITE
15	LOWER SPRING CARRIER	BRASS
16	*ADJUSTMENT SPRING	STEEL
16A	DIAPHRAGM SPRING	STAINLESS STEEL
16B	*O-RING	EPDM
17	TOP SPRING CARRIER	BRASS
18	LOCKNUT	AISI304 / 1.4301
19	*PUSH ROD	AISI316 / 1.4401
19A	*PILOT VALVE (SOFT)	PTFE/GR; RULON, ETC
20	*PILOT VALVE PLUG	HARDENED ST. STEEL
20A	*PILOT VALVE SEAT	AISI316 / 1.4401
21	*PILOT VALVE GASKET	COPPER
22	*PILOT VALVE SPRING	AISI302 / 1.4300
24	BOLTS	STEEL 10.9
24C	BOLTS	STEEL 10.9
25	COMPRESSION FITTING	PLATED CARBON STEEL
26	BALANCE PIPE	COPPER
27	PILOT VALVE STRAINER SCREEN	AISI304 / 1.4301
28	*STRAINER NUT	AISI304 / 1.4301
29	GASKET	COPPER
30	STUDS	34CrNiMo6 / 1.6582
31	NUTS	STEEL Cl.8
46	SPRING IDENT. PLATE	ALUMINIUM
48	HANDWHEEL	PLASTIC/ST. STEEL
100	** PRESSURE REGULATOR (Relieving)	ADCA P-10
105	SOLENOID VALVE	BRASS
107	*STRAINER	ADCA IS100I-ST. STEEL


* Available spare parts

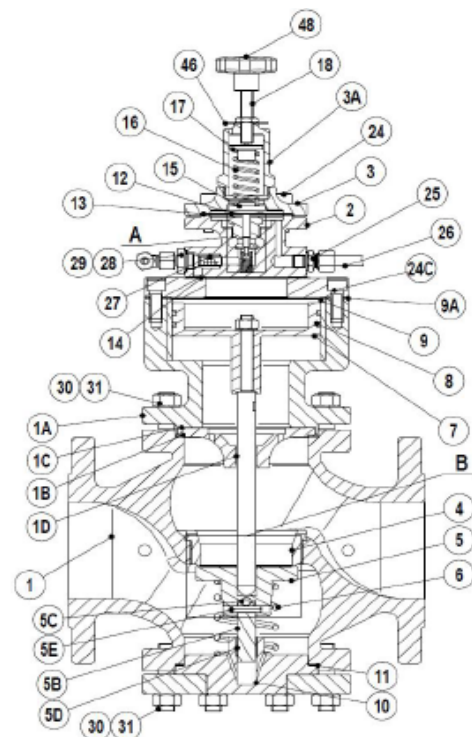


Low pressure diaphragm




Compressed air top.



Detail A
Pilot main valve



Detail A
Pilot soft main valve



Detail B
Main soft valve

PRESSURE RANGES IN bar				
SPRING COLOUR	GREEN W/1 Diaphragm	BLUE W/1 Diaphragm	RED W/2 Diaphragms	BLACK W/2 Diaphragms
Red. Pressure	0,07 to 0,5 bar *	1,5 to 5,5 bar **	3,5 to 8,5 bar **	7 to 17 bar **
Red. Pressure	0,35 to 2 bar **	/	/	/

* With low pressure top; **Standard diaphragm.

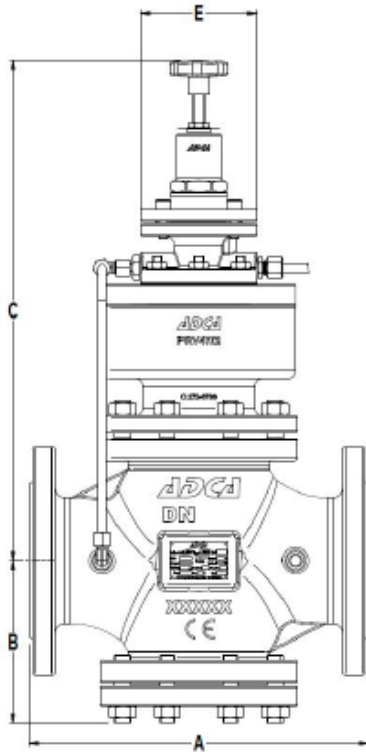


Fig.1

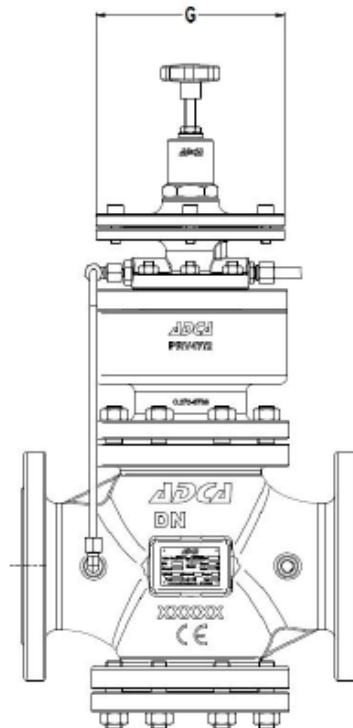


Fig.2

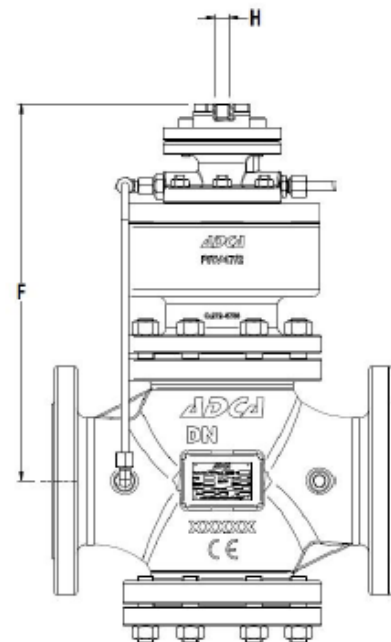


Fig.3

Fig.1 - Valve with standard diaphragm; Fig.2 - Valve with low pressure top; Fig.3 - Valve with compressed air top.

DIMENSIONS - VALVE BODY (mm)								
DN	A EN1092-1 Flanges	B	C	E	F	G	H	WEIGHT Kgs
65	290	150	470	120	340	195	1/4"	46,7
80	310	150	480	120	350	195	1/4"	56,7
100	350	168	515	120	386	195	1/4"	76,9

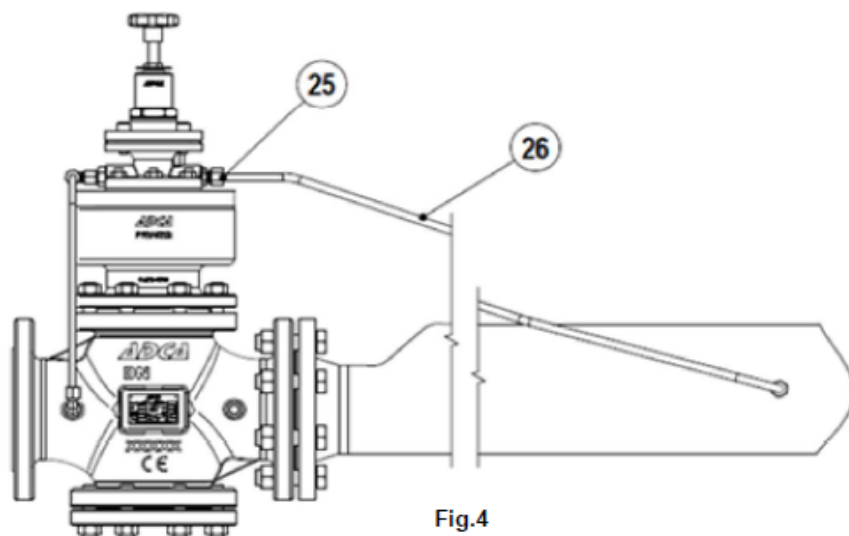


Fig.4

PRV 47/2 Standard for steam, compressed air or gases (Fig.4)

Description of operation: the high pressure upstream fluid is admitted to the valve and pilot valve. By compressing the regulating spring over the diaphragm, the pilot valve opens admitting regulated pressure on the top of the piston, which opens the main valve allowing the flow. The downstream pressure is then transmitted through the balance pipe, acting on the underside of the diaphragm.

Any downstream pressure increase deflects the diaphragm and the pilot valve closes, thus shutting off regulated gas to the piston which in turn closes the main valve assisted by the upstream pressure and loading spring. When the correct downstream pressure is achieved, the valve opens again, repeating the already described operation.

Important: the balance pipe nr.26 (supplied with the valve) must always be connected unless the valve was supplied with the balance pipe connected to the valve body. However, the fitting of the balance pipe is highly recommended when:

- The reduced pressure is below 55% of the inlet pressure (mandatory for pressure reductions greater than 10:1)
- Instability of reduced pressure occurs
- When a low pressure top assembly is fitted

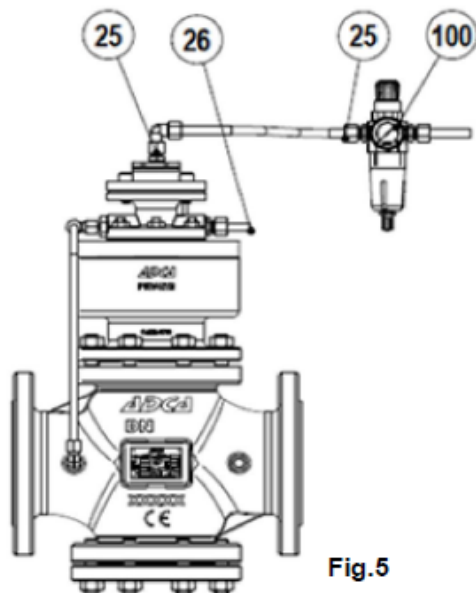


Fig.5

PRV47/2 valve with compressed air top for remote control (Fig.5)

The regulating spring force is placed by a compressed air signal.

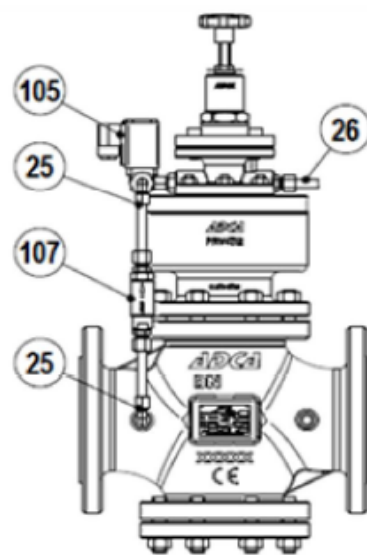


Fig.7

PRV47/2E with solenoid valve for electric remote control (Fig.7)

This valve version operates like the standard valve but it allows a remote control closure by means of a switching or timer control.

When closing the solenoid valve, the pressure signal to the pilot valve is interrupted and thus also the main valve remains closed.

PRV 47/2 - STEAM CAPACITY TABLE (Kg/h)										
INLET barg	OUTLET barg	SATURATED STEAM								
		DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	100
0,7	0,35	40	75	125	190	280	480	-	-	-
1	0,4	45	95	160	240	355	620	-	-	-
	0,6	40	83	140	210	308	535	-	-	-
2	0,4 ÷ 1	75	150	250	380	545	960	1490	1880	3390
	1,2	65	138	230	345	515	900	1335	1685	3022
	1,6	50	105	175	265	393	685	-	-	-
3	0,4 ÷ 1,5	100	200	335	510	750	1310	1980	2475	4358
	2	85	170	290	450	660	1155	1732	2175	3962
	2,2	80	165	277	416	613	1050	1585	1981	3616
	2,6	60	127	203	315	467	818	-	-	-
4	0,4 ÷ 2	125	250	420	630	920	1580	2530	3170	5696
	2,5	114	225	385	580	850	1465	2328	2923	5249
	3,2	92	183	309	482	708	1205	1735	2179	3913
	3,6	68	137	237	353	536	932	-	-	-
5	0,4 ÷ 2	150	310	512	755	1114	1895	3022	3765	6733
	3	144	295	488	743	1095	1835	2869	3615	6486
	4	115	225	373	578	846	1430	2130	2675	4852
	4,2	105	213	343	525	770	1342	-	-	-
6	0,4 ÷ 3	175	355	602	919	1358	2298	3666	4453	8021
	4	159	314	538	827	1217	2142	3219	4012	7229
	5	119	250	411	637	941	1644	2276	2870	5150
	5,2	109	217	360	568	839	1465	-	-	-
7	0,4 ÷ 3,5	197	410	670	1005	1540	2644	3959	4952	8911
	5	178	358	587	908	1345	2306	3513	4405	7921
	6	132	271	452	688	1027	1773	2764	3022	5416
	6,2	122	251	416	635	934	1618	-	-	-
8	0,4 ÷ 4	225	471	778	1169	1759	3043	4605	5745	10398
	5	221	339	730	1118	1659	2884	4305	5395	9704
	6	192	385	639	976	1451	2513	3761	4704	8467
	7	146	293	481	732	1085	1887	2727	3168	5695
	7,2	137	274	453	692	1011	1782	-	-	-
9	0,4 ÷ 5	251	518	856	1325	1923	3358	5051	6334	11387
	6	241	500	788	1222	1766	3095	4653	5794	10396
	7	206	398	679	1068	1559	2676	4060	5051	8961
	8	156	314	514	794	1142	2053	2671	3319	5991
	8,2	145	292	483	741	1090	1888	-	-	-
10	0,4 ÷ 5	275	561	944	1468	2127	3718	5592	7031	12377
	6	272	551	917	1419	2074	3619	5443	6830	12270
	7	252	508	838	1268	1871	3249	4951	6187	10891
	8	213	431	722	1118	1659	2831	4108	5149	9209
	9	163	333	548	843	1244	2152	2721	3466	6190
	9,2	150	298	493	756	1143	1929	-	-	-
12	1 ÷ 6	330	680	1124	1732	2541	4407	6631	8216	14850
	8	311	629	1023	1575	2332	4034	6090	7573	13862
	10	265	533	812	1271	1867	3202	4503	5592	9903
	11	175	364	568	924	1350	2359	2920	3612	6536
15	1 ÷ 8	408	839	1373	2138	3118	5403	8164	10393	18317
	12	339	656	1068	1629	2441	4250	6385	7968	14356
	14	199	401	662	1017	1503	2619	2968	3661	6438
17	1 ÷ 9	425	863	1460	2178	3165	5343	8204	11360	20290
	15	347	709	1190	1816	2694	4712	5870	7363	14855
	16	207	416	717	1217	1608	2824	3598	4312	6330
20	1 ÷ 12 (2 ÷ 12) *	541	1062	1774	2746	4001	6971	10390	13363	23765
	15	459	931	1552	2335	3476	6184	9156	11382	20298
	17	391	648	988	1748	2840	4698	6098	7628	9476
25	2,5 ÷ 12 (6 ÷ 12) *	685	1337	2191	3360	4971	8392	12870	15845	29200
	15	680	1320	2183	3356	4877	8284	12690	15710	29010
	17	641	1256	2084	3156	4670	7866	12370	14860	27720
28	5 ÷ 15 (6 ÷ 15) *	781	1521	3355	3864	5611	9862	14870	18380	33164
	17	763	1471	3259	3768	5506	9652	14340	17770	32665

Detailed information concerning the sizes DN15 to DN50 available in the catalogue IS PRV47.10

* Minimum outlet pressures for the sizes DN65 to DN100.

ORDERING CODES PRV47/2

Valve Model	V47			S.	1			1.	A	65
PRV47-standard steam use	V47									
PRV47G-compressed air and gases	V47G									
Material Construction										
Standard steel construction	(1)									
Stainless steel construction (special design)	I									
Remote Control and Pilots										
Standard valve	(1)									
Solenoid valve 220V for remote closure up to 10 bar-180°C	E									
Pressure sustaining / reducing a)	S									
Pressure sustaining / reducing / solenoid	ES									
Diaphragm Type										
Standard diaphragm	S.									
Low pressure diaphragm	L.									
Outlet Pressure										
Green spring 0,35 to 2 bar - single diaphragm	1									
Blue spring 1,5 to 5,5 bar - single diaphragm	2									
Red spring 3,5 to 8,5 bar - double diaphragm	3									
Black spring 7 to 17 bar - double diaphragm	4									
Pneumatic control top 0,35 to 4 bar - single diaphragm	6									
Pneumatic control top 2 to 17 bar - double diaphragm	7									
Piston Rings										
Bronze c)	(1)									
FKM c)	V									
EPDM c)	E									
NBR c)	N									
Drain Connection										
Standard valve	(1)									
Drain connection DN 3/8"	D									
Valve Plug										
Standard metal to metal with hardened plug	1.									
Stellited valve and plug	2.									
Soft plug - Virgin PTFE	3.									
Soft plug - PTFE/GR	4.									
Soft plug - Rulon	5.									
Soft plug - Viton	6.									
Connections										
Flanged EN 1092-1 PN16	L									
Flanged EN 1092-1 PN40	N									
SIZE										
DN 65	65									
DN 80	80									
DN 100	100									
Special valves / Extras b)										E

Remarks:

(1) Omitted if a standard valve is requested

a)PS15 Sustaining valve standard spring : 0,2 to 10 bar

b)Full description or additional codes has to be hadded in case of a a non-standard combination .

c)Valve limited to maximum operating temperature materials