

# Stainless Steel Angle Valve


## Typical Applications.

Air Drying Equipment  
 Autoclaves  
 Bottling & Dispensing Equipment  
 CIP Equipment  
 Disinfection  
 Food Industry  
 Gas Industry  
 Industrial Compressors  
 Ink & Paint Dispensing  
 Laundry Equipment  
 Medical Equipment  
 Pollution Control Equipment  
 Process Control Applications  
 Rubber machinery  
 Steam Applications  
 Sterilizers  
 Textile Dyeing & Drying



Nominal Size	DN10 to DN50
Connections	G <sup>3/8</sup> - G2
Nominal Pressure	PN16
Medium	Neutral gases & liquids
Medium Viscosity	600 mm <sup>2</sup> /s (600 cSt)
Medium Temperature	-10°C to 180°C
Operation	Direct
Control	Single Acting
Control Media	Compressed air 3-8 BarG
Ambient Temperature	-10°C to 60°C
Installation	Actuator upwards

## Construction.

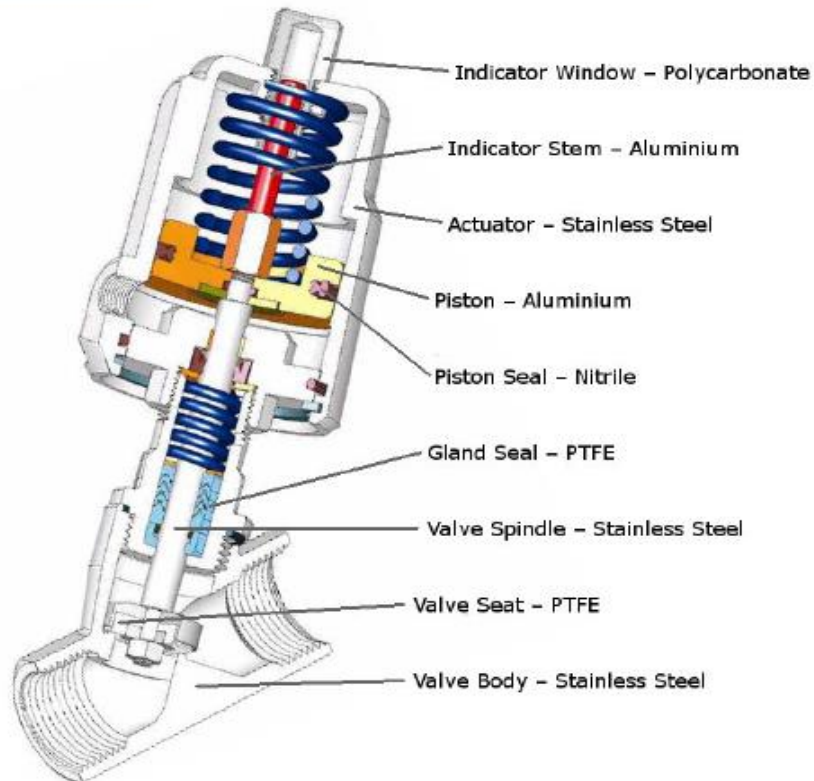

## Dimensions.

Valve Size	Actuator Size	G	A	D	K	L	SW	R	T
DN10	40	G $\frac{3}{8}$	120	45.5	115	68	26.6	35	15
DN15	40	G $\frac{1}{2}$	120	45.5	115	68	26.6	35	15
DN20	50	G $\frac{3}{4}$	137	60	131	75	32	35	16
DN25	50	G1	149	60	140	90	39.5	35	17
DN32	63	G1 $\frac{1}{4}$	188	77	175	116	50	43	21
DN40	63	G1 $\frac{1}{2}$	190	77	178	120	55.3	43	20
DN50	63	G2	203	77	184	138	70	43	22

