

**AUTOMATIC AIR AND GAS VENTS FOR LIQUID SYSTEMS  
 AE16SS**

**DESCRIPTION**

The AE16SS all stainless steel air eliminator removes air from HVAC systems and are also suitable for non corrosive and/or dangerous liquids compatible with the construction, providing that their specific weight is no less than 0,75 kg/dm<sup>3</sup>.

This ball float type automatic air eliminator can be used in combination with other air elimination and separation systems or directly applied at high points in the piping.

**MAIN FEATURES**

Corrosion resistant working parts.  
 Replaceable internal parts.

OPTIONS: Integrated check valve.

USE: Cold and hot water systems.

**AVAILABLE MODELS:**

AE16SSE – EPDM valve.  
 AE16SSV – Viton valve.  
 Suffix "CK": Version with integrated check valve.

SIZES: 1/2" and 3/4".

CONNECTIONS: Female threaded ISO 7 Rp or NPT.  
 1/2" or 3/4" vertical inlet.  
 1/2" vertical outlet.

INSTALLATION: Vertical installation. It must be installed absolutely vertically at points in the plant where the air tends to collect. The drain should be piped to a safe position.  
 See IMI – Installation and maintenance instructions.





BODY LIMITING CONDITIONS	
THREADED PN 16 ALLOWABLE PRESSURE	RELATED TEMPERATURE
16 bar	100 °C
14,5 bar	150 °C
13,4 bar	200 °C
12,7 bar	250 °C

PMO – Maximum operating pressure: 14 bar.  
 TMO – Maximum operating temperature:  
 EPDM valve: 130 °C;  
 Viton valve: 150 °C.  
 Min. liquid specific weight: 0,75 kg/dm<sup>3</sup>.  
 Maximum working diff. pressure: 12 bar.

CE MARKING – GROUP 2 (PED – European Directive)	
PN 16	Category
1/2" and 3/4"	SEP



FLOW RATE CAPACITY (NL/min)												
MODEL	SIZE	DIFFERENTIAL PRESSURE (bar)										
		0,5	1	2	3	4	5	6	7	8	10	12
AE16SS	1/2" – 3/4"	47	70	109	145	182	218	255	291	327	400	473

Values shown refer to capacities of air discharge at 15 °C, under average atmospheric pressure (1013 mbar).  
 If the temperature of the air differs from 15 °C, the discharge capacity can be corrected by multiplying it by:  $\frac{288}{273 + T}$ , where T is the actual temperature in °C.  
 It may be assumed that the temperature of the air is equal to the temperature of the water.

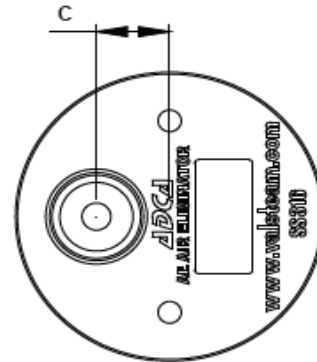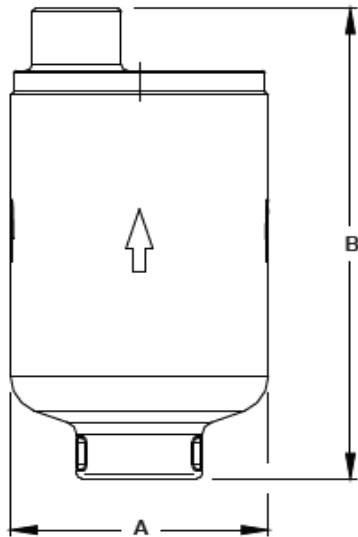

**DIMENSIONS (mm)**

SIZE	A	B	C	WEIGHT (kg)
1/2"	78	152	19	1,5
3/4"	78	152	19	1,5

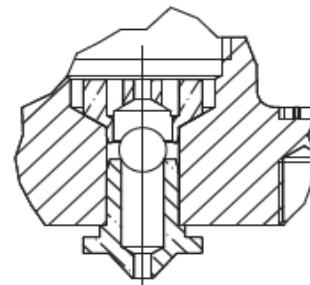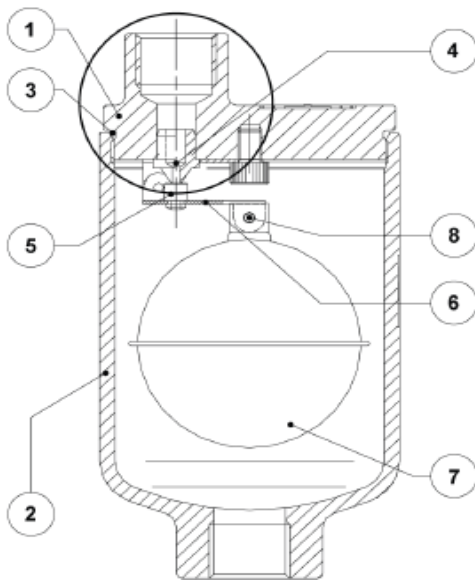

*Optional  
check valve*

**MATERIALS**

POS. N°	DESIGNATION	MATERIAL
1	Body	A351 CF8M / 1.4408
2	Cover	A351 CF8M / 1.4408
3	* O-ring	EPDM
4	* Seat	AISI 316 / 1.4401
5	* Valve	Viton; EPDM
6, 8	* Lever	AISI 304 / 1.4301
7	* Float	AISI 304 / 1.4301

\* Available spare parts.